


FIRE RATED FLUSH DOORS

Nominal size is 1-3/4" (45mm)

Standard Fire Rated Doors tested by DOST under ASTM E 152-58.

Warnock Hersey Certified fire listed doors tested under ASTM E 152-58, CAN/ ULC-S104, NFPA-252, UBC-7-2-94, UL 10 B & 10 C, NFPA 252

Fire rating available 20 minutes, 40 minutes, 60 minutes and 90 minutes.

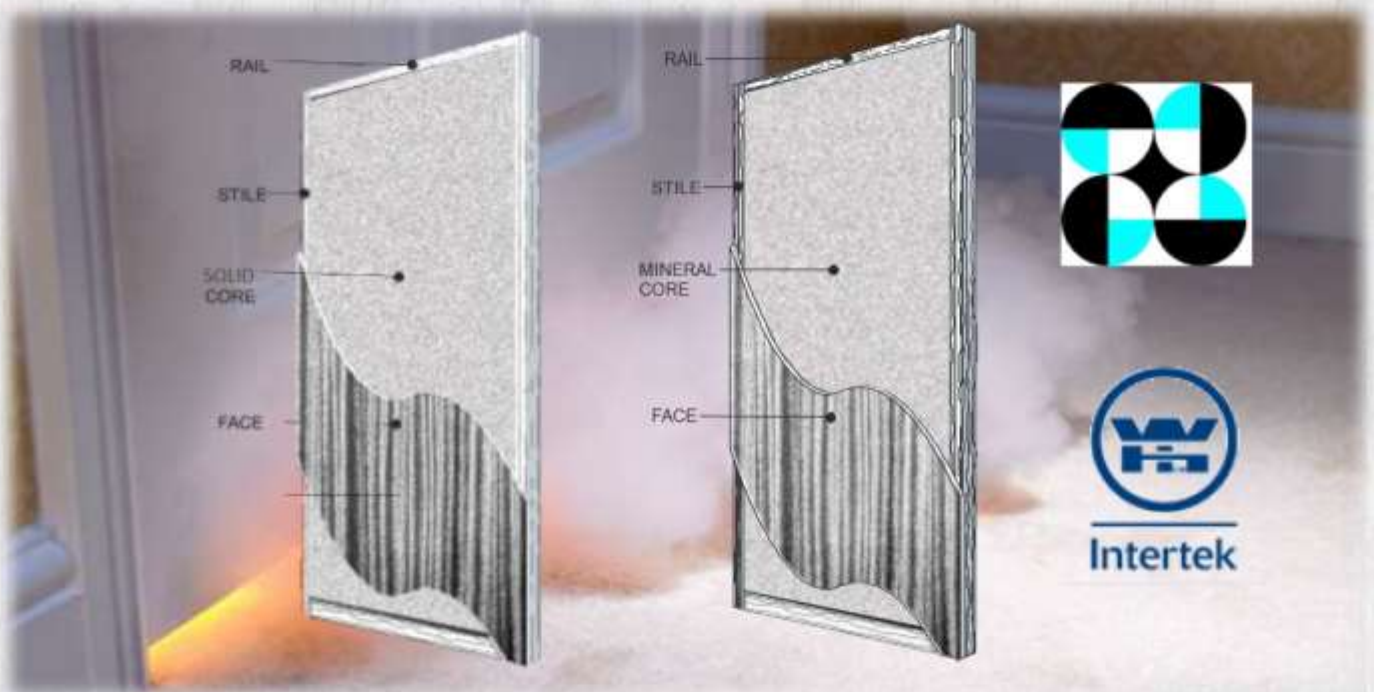

MAXIMUM SIZES

Singles 4' -0 wide x 9' -0 high

Pairs 8' -0 wide x 9' -0 high

Pairs (Double Egress pairs) 8' -0 wide 9-0 high

WEIGHTS

Most fire rated doors will weigh between 150lbs and 200lbs in 1-3/4" thicknesses, contact us directly for exact weight for your sizing and dimensions.

STC SOUND RATED DOORS

All doors come with STC sound ratings begin at 40 and have become a critical consideration for every project.

FIRE RATED GLASS DOORS

Glass provision using Assa Abloy

LT-B1 maximum permissible 100 sq. in